


Refs.
933

made
in
E.U

Classic Forstner Bit



Materials
Low density wood,
veneered boards,
densified laminated,
wood,
plywood.

Features
Head self-center,
2 central blades,
2 cutting blades on
the circumference.

Benefits
Accurate holes,
penetration.

| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 10 | 933D10 | 3336600145931 | x1 |
| 12 | 933D12 | 3336600145948 | x1 |
| 15 | 933D15 | 3336600145412 | x1 |
| 16 | 933D16 | 3336600145955 | x1 |
| 18 | 933D18 | 3336600145962 | x1 |
| 20 | 933D20 | 3336600145429 | x1 |
| 22 | 933D22 | 3336600145979 | x1 |

| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 25 | 933D25 | 3336600145436 | x1 |
| 26 | 933D26 | 3336600145443 | x1 |
| 30 | 933D30 | 3336600145450 | x1 |
| 35 | 933D35 | 3336600145467 | x1 |
| 40 | 933D40 | 3336600145986 | x1 |
| 45 | 933D45 | 3336600145993 | x1 |
| 50 | 933D50 | 3336600146006 | x1 |

934

made
in
E.U

Woodmax Forstner Bit



Materials
European and
exotic hard wood
MDF
Plywood

Benefits
Speed,
Higher penetration,
Speed than classic drills,
Accurate cutting,
Limited
overheating

Features
Head self-center
2 central blades
2 cutting blades on the
circumference.
Specific geometry
of teeth.



**PREVENTS
HEATING**

| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 15 | 934D15 | 3336600145474 | x1 |
| 16 | 934D16 | 3336600145481 | x1 |
| 18 | 934D18 | 3336600145498 | x1 |
| 20 | 934D20 | 3336600145504 | x1 |
| 22 | 934D22 | 3336600145511 | x1 |
| 25 | 934D25 | 3336600145528 | x1 |

| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 26 | 934D26 | 3336600145535 | x1 |
| 30 | 934D30 | 3336600145542 | x1 |
| 35 | 934D35 | 3336600145559 | x1 |
| 40 | 934D40 | 3336600145566 | x1 |
| 45 | 934D45 | 3336600145573 | x1 |
| 50 | 934D50 | 3336600145580 | x1 |




940D - page 49

**938C
939**

made
in
E.U

Set of 5 depth adjusting collars

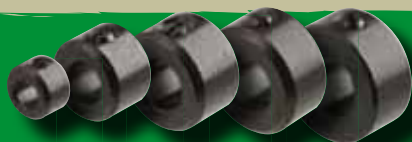

Ø 3-4-5-6-8

Shell Drill Countersink



| | | |
|------|---------------|----|
| 938C | 3336600145795 | x1 |
|------|---------------|----|

| | | |
|--------|---------------|----|
| 939D03 | 3336600145801 | x1 |
| 939D04 | 3336600145818 | x1 |
| 939D05 | 3336600145825 | x1 |

Woodmax Carbide Forstner Bit

Refs.
936

made
in
E.U

Materials

European hard wood,
Exotic hard wood,
MDF,
plywood,
veneered boards,
plastics.

Features

Head self-center
2 central blades
2 cutting blades on the
circumference
Specific geometry
of teeth.

Benefits

Long life.
Precise cutting without
brightness.
Special very
hard wood.



**CARBIDE
TEETH**

| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 15 | 936D15 | 3336600145658 | x1 |
| 16 | 936D16 | 3336600146013 | x1 |
| 18 | 936D18 | 3336600146020 | x1 |
| 20 | 936D20 | 3336600145665 | x1 |
| 22 | 936D22 | 3336600146037 | x1 |
| 25 | 936D25 | 3336600145672 | x1 |
| 26 | 936D26 | 3336600146044 | x1 |

| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 30 | 936D30 | 3336600145689 | x1 |
| 32 | 936D32 | 3336600146051 | x1 |
| 35 | 936D35 | 3336600145696 | x1 |
| 40 | 936D40 | 3336600145702 | x1 |
| 45 | 936D45 | 3336600146068 | x1 |
| 50 | 936D50 | 3336600146075 | x1 |

Disc Plug Cutter

928

made
in
E.U

Materials

Hard wood,
Low density wood,
Densified laminated,
Wood,
Polywood



Features

Multiple knives
Double clearing
75 mm length without
ejection,
40 mm with
ejection.

Benefits

Recommended for
covering fastener holes in
furniture, and other wood-
working projects.
Accurate hole.
No vibration.




| Ø | ref. | EAN | packaging* |
|----|--------|---------------|------------|
| 10 | 928D10 | 3336600145719 | x1 |
| 15 | 928D15 | 3336600145726 | x1 |
| 20 | 928D20 | 3336600145733 | x1 |
| 25 | 928D25 | 3336600145740 | x1 |
| 30 | 928D30 | 3336600145757 | x1 |
| 35 | 928D35 | 3336600145764 | x1 |

Extension Shank for Forstner bit

937

made
in
E.U



| | | | | |
|-------------------|----|-------------|---------------|----|
| for Ø 12 to 21 mm | 08 | 937D08L0130 | 3336600145771 | x1 |
| for Ø 22 to 50 mm | 10 | 937D10L0130 | 3336600145788 | x1 |